
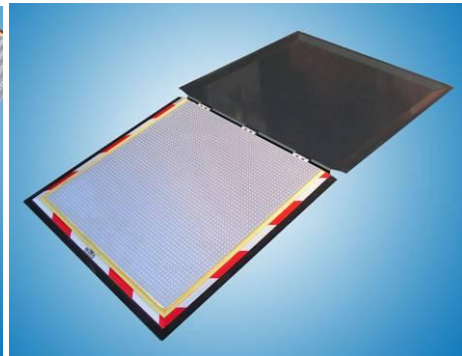
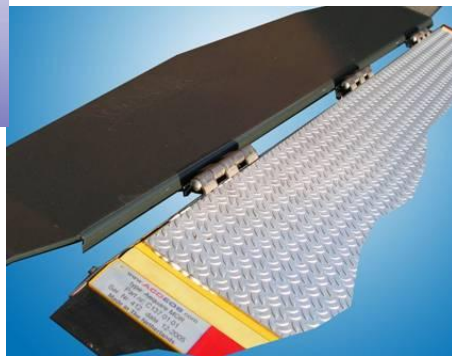


AEQUARE MOR

Manual Operated Ramp

The AEQUARE MOR Manual Operated Ramp is a basic hand operated ramp for low floor city busses.

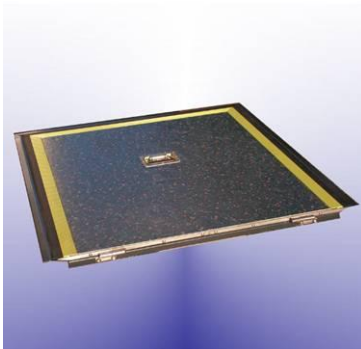

AEQUARE MOR Features:

- Simple and robust construction.
- Full stainless steel triple hinge
- Aluminum chassis with aluminum sandwich panel ramp
- Rubber edge
- Extreme thin installation thickness of 18 mm.
- Very smooth transition from ramp to the bus floor for easy access.
- Available with a choice of operation handles.

AEQUARE MOR Specifications:

Platform	l x w = 824 x 880 mm
Max Load	300 Kg
Weight	16 Kg in Aluminium floor shell.
Compliant with	2001/85 EC Bus directive, 98/37 EC Machine directive (CE),
Install. Dim.	width x length x height = 988 x 878 x 15 mm (ask for detailed installation drawing)
Ramp	High strength aluminum sandwich panel with non-skid surface.
Chassis	3mm Aluminium plate with non-skid surface
Stiffness	0.7 % ramp deflection at 300Kg



AEQUARE MOR

Manual Operated Ramp